


WEATHERMASTER

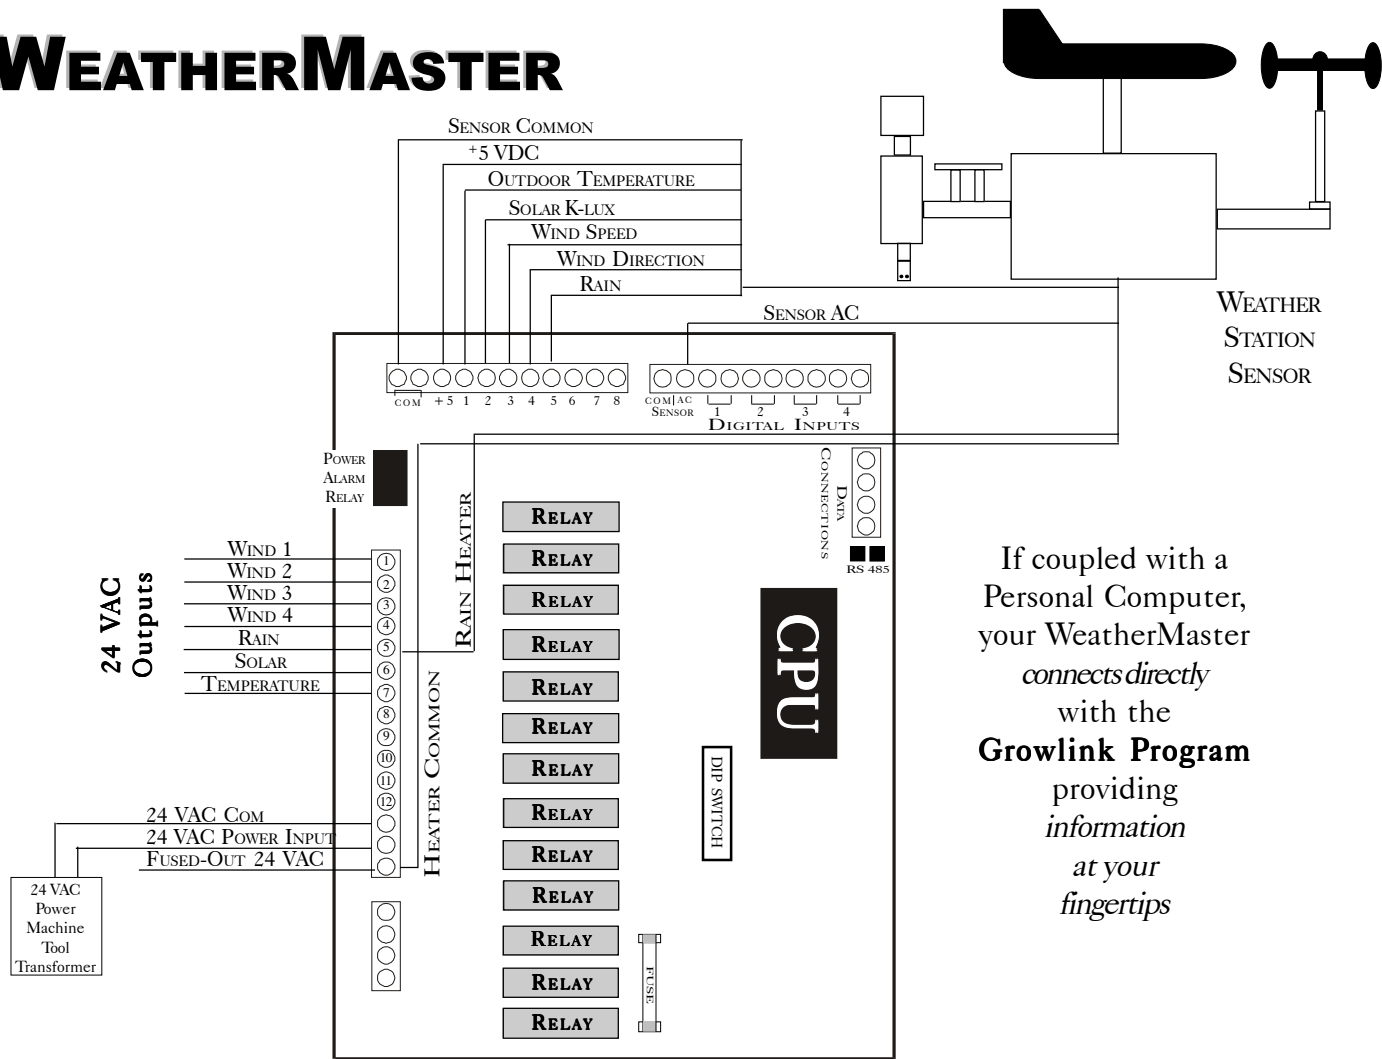

If coupled with a Personal Computer, your WeatherMaster connects directly with the Growlink Program providing information at your fingertips

WeatherMaster Specifications

- ◆ TEMPERATURE ACCURACY
TEMPERATURE $\pm 1^{\circ} F$ OR C
- ◆ SOLAR ACCURACY
 $\pm 20\%$
- ◆ WIND DIRECTION READOUT
8 COMPASS POINTS
- ◆ SOLAR DIFFERENTIAL
 $\pm 5 K-LUX$
- ◆ SOLAR READOUT
K-LUX
- ◆ RAIN SENSITIVITY
ADJUSTABLE
- ◆ RAIN SENSOR
HEATED GRID

- ◆ PROGRAMMING
FRONT PANEL TOGGLE SWITCHES
- ◆ WIND RESET TIME DELAY
SELECTABLE: 2, 10, OR 30 SEC.
1½, 2, OR 5 MIN.
- ◆ WIND SENSITIVITY
 $\pm 1 MPH$
- ◆ TEMPERATURE DIFFERENTIAL
USER SELECTABLE: 1 TO 8 DEGREES
- ◆ TEMPERATURE READOUT
FAHRENHEIT OR CENTIGRADE
- ◆ OUTPUT SWITCHES
MANUAL, CENTER OFF, AUTOMATIC

- ◆ DIGITAL READOUT
16 CHARACTERS,
2-LINES ALPHANUMERIC LCD
- ◆ LIGHTED STATUS INDICATORS
HIGH INTENSITY LED
- ◆ ENCLOSURE
NON-METALLIC, WEATHERPROOF,
CLEAR COVER, LOCKABLE
- ◆ CONTROL OUTPUTS
24 VAC
- ◆ OPERATING VOLTAGE
LOW VOLTAGE, 24 VAC
- ◆ PHYSICAL SIZE
8.5"W x 10.5"H x 5.5"D



26111 Ynez Road, Suite C-4 ◆ Temecula, CA 92591 ◆ 951.296.3340 ◆ Fax 951.296.3350 ◆ www.microgrow.com

